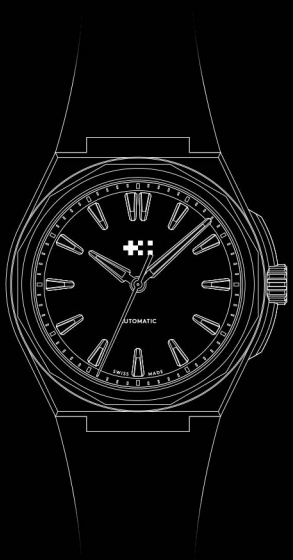

The Twelve 36

Owner's handbook

Time on your side

Your Twelve 36 watch has been designed in England and handbuilt in Switzerland by highly talented craftspeople This ensures not only accurate and precise timekeeping, but also brings a real pride of ownership that only watches of the highest quality standards can hope to deliver.

You have made an investment, a good one, and the aim of this handbook is to help you make the most of that investment in what we hope will be a lifetime of ownership.

Mike France
CEO & co-founder

Mike

Christopher Ward

The features and technical details of your Twelve 36

- Swiss made automatic mechanical movement
- Elaboré-grade Colimaçoné movement finishing
- Brushed, sandblasted and polished case
- Screw-down crown and exhibition caseback
- Anti-reflective sapphire crystal
- Three dimensional stamped dial with applied diamond-polished indexes
- Brushed and polished hands

Calibre:	Sellita SW200-2 Power+
Jewels:	26
Vibrations:	28,800 vph (4Hz)
Power reserve:	60-65 hours
Timing tolerance:	-5/+12 secs per day
Complication:	Automatic, Center Seconds
Material:	316L stainless steel
Diameter/Weight:	36mm: 56g
Height:	9.95mm
Lume:	Super-LumiNova® Grade X1 BL C1
Water resistance:	10 ATM (100 metres)
Strap width	22.45mm

Setting the time

Unscrew the crown* anti-clockwise from the case to position 1 for winding in power. Wind in a clockwise direction to re-power the watch.

Pull gently into position 2. This position is used for handsetting and stopping of the seconds hand. For precise time setting it is recommended to pass beyond the desired minute and to set the hand backwards.

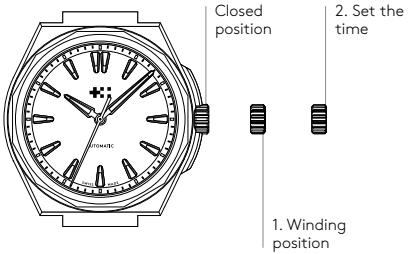

*The screw-down crown should sit flush to the case (position 1) in order to maintain water resistance.

AUTOMATIC

Changing your strap

1. Locate the quick-release pins on the underside of your case. Pinch the pins inwards to detach.
2. To reattach your strap or bracelet, pinch the pins inwards, and align the spring bars so they click securely into the lug holes on either side of the strap or bracelet.

Detaching and reattaching a strap

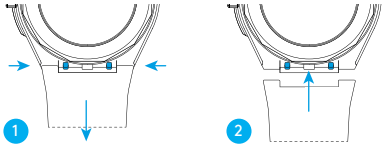

Detaching and reattaching a bracelet

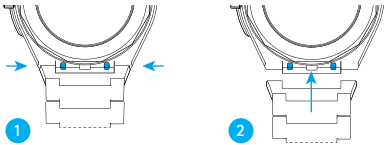

Using the micro adjustment on your bracelet

1. Ensure butterfly clasp is closed.

2. Pull firmly on either side of the bracelet to open micro adjust.

   There is two 1.5mm micro adjust positions on either side of the butterfly clasp allowing for a maximum extension of 3mm. To extend simply pull gently on one, or both sides of the bracelet clasp depending on the desired amount of extension.

3. To shorten simply push the bracelet back towards the clasp.

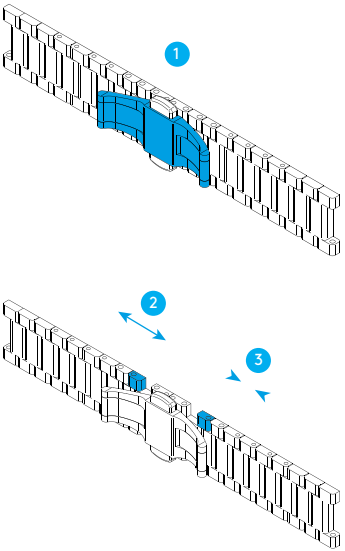

Servicing your watch

Our approach to service is about uncompromised quality and great value for money. The process, led by our expert technicians, won't cost the earth and will have the watch back on your wrist in reasonable time. We recommend you service your watch every three to four years to keep it in peak condition.

Christopher Ward

Your 60|60 Guarantee

Your Christopher Ward watch is covered by our industry-leading 60|60 Guarantee.

This means that you can return it 60 days after purchase and receive a full refund (as long as the watch is in perfect condition).

And if your watch develops a mechanical fault within five years (60 months), we'll repair it for free. Please use the warranty card opposite to arrange this.

If you ever need to get hold of us we're at your service. And if you'd like to explore the CW world more, you can follow us on social media.

ChristopherWardLondon @chriswardlondon